



Units:mm

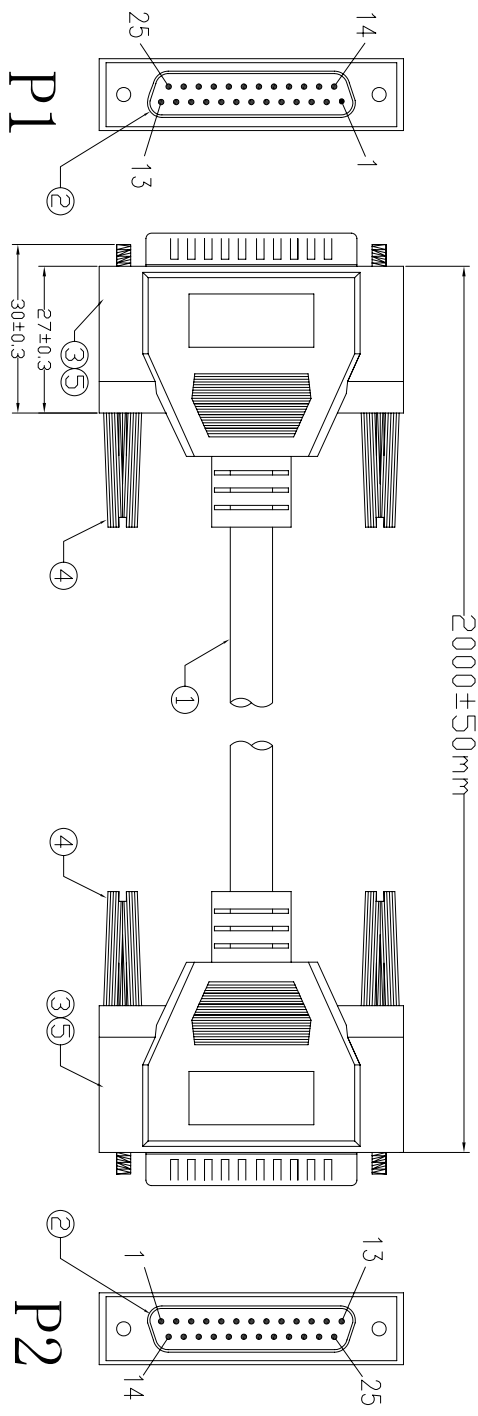

Electronic Test:
 1.100% Test,(Open,Short,Miss Wire)
 2.Contact Resistance:5 ohm max.
 3.Insulation Resistance:10M ohm min.
 4.Hi-Pot:300V DC/10ms

PIN ASSIGNMENT	
P1	P2
1	1
2	2
3	3
4	4
5	5
6	6
7	7
8	8
9	9
10	10
11	11
12	12
13	13
14	14
15	15
16	16
17	17
18	18
19	19
20	20
21	21
22	22
23	23
24	24
25	25
SHELL	SHELL

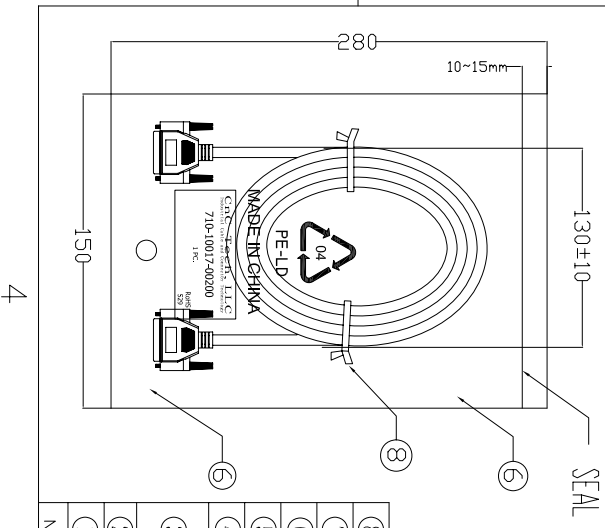

NO.	NAME	Q'TY	SPECIFICATION
①	CABLE	1	NOUL 28AWG*25C+D+AL/NV OD6.5mm JACKET BEIGE(V-29) L=2000±10MM
②	CONN	2	DB 25P MALE SODER TYPE PIN G/F SHELL NI-PLATED INSULATOR COLOR:BLUE
③	IN JACKET	18g	CLEAR LD-PE (Mould NO:NM-33)
④	SCREW	4	#4-40UNC TYPE L=30mm,NICKEL PLATED,MOLD:BEIGE(V-29) ABS
⑤	TUBE	2	HEAT SHRINK TUBE BLACK OD1.5*20MM
⑥	PE BAG	1	CLEAR SIZE: 150*280*0.05mm PRINT BLACK"MADE IN CHINA""PC"及印生"周期"有透气孔
⑦	PE BAG	1/10	CLEAR SIZE: 360*380*0.05mm PRINT BLACK"MADE IN CHINA"+"10PCS"及印生"周期"有透气孔
⑧	TIE	2	WHITE L=80mm

CNC Tech, LLC
 Industrial Cable and Connector Technology

DRAWN BY	ZHONGHS	DRAWING NO.	
CHECKED BY		CUSTOMER	
APPROVAL BY		ITEM NO.	710-10017-00200
DECIDE BY		DATE	2012-02-06
VERSIONS/EDITION	A/0	PROJECTION	